


1

2

3

4

5

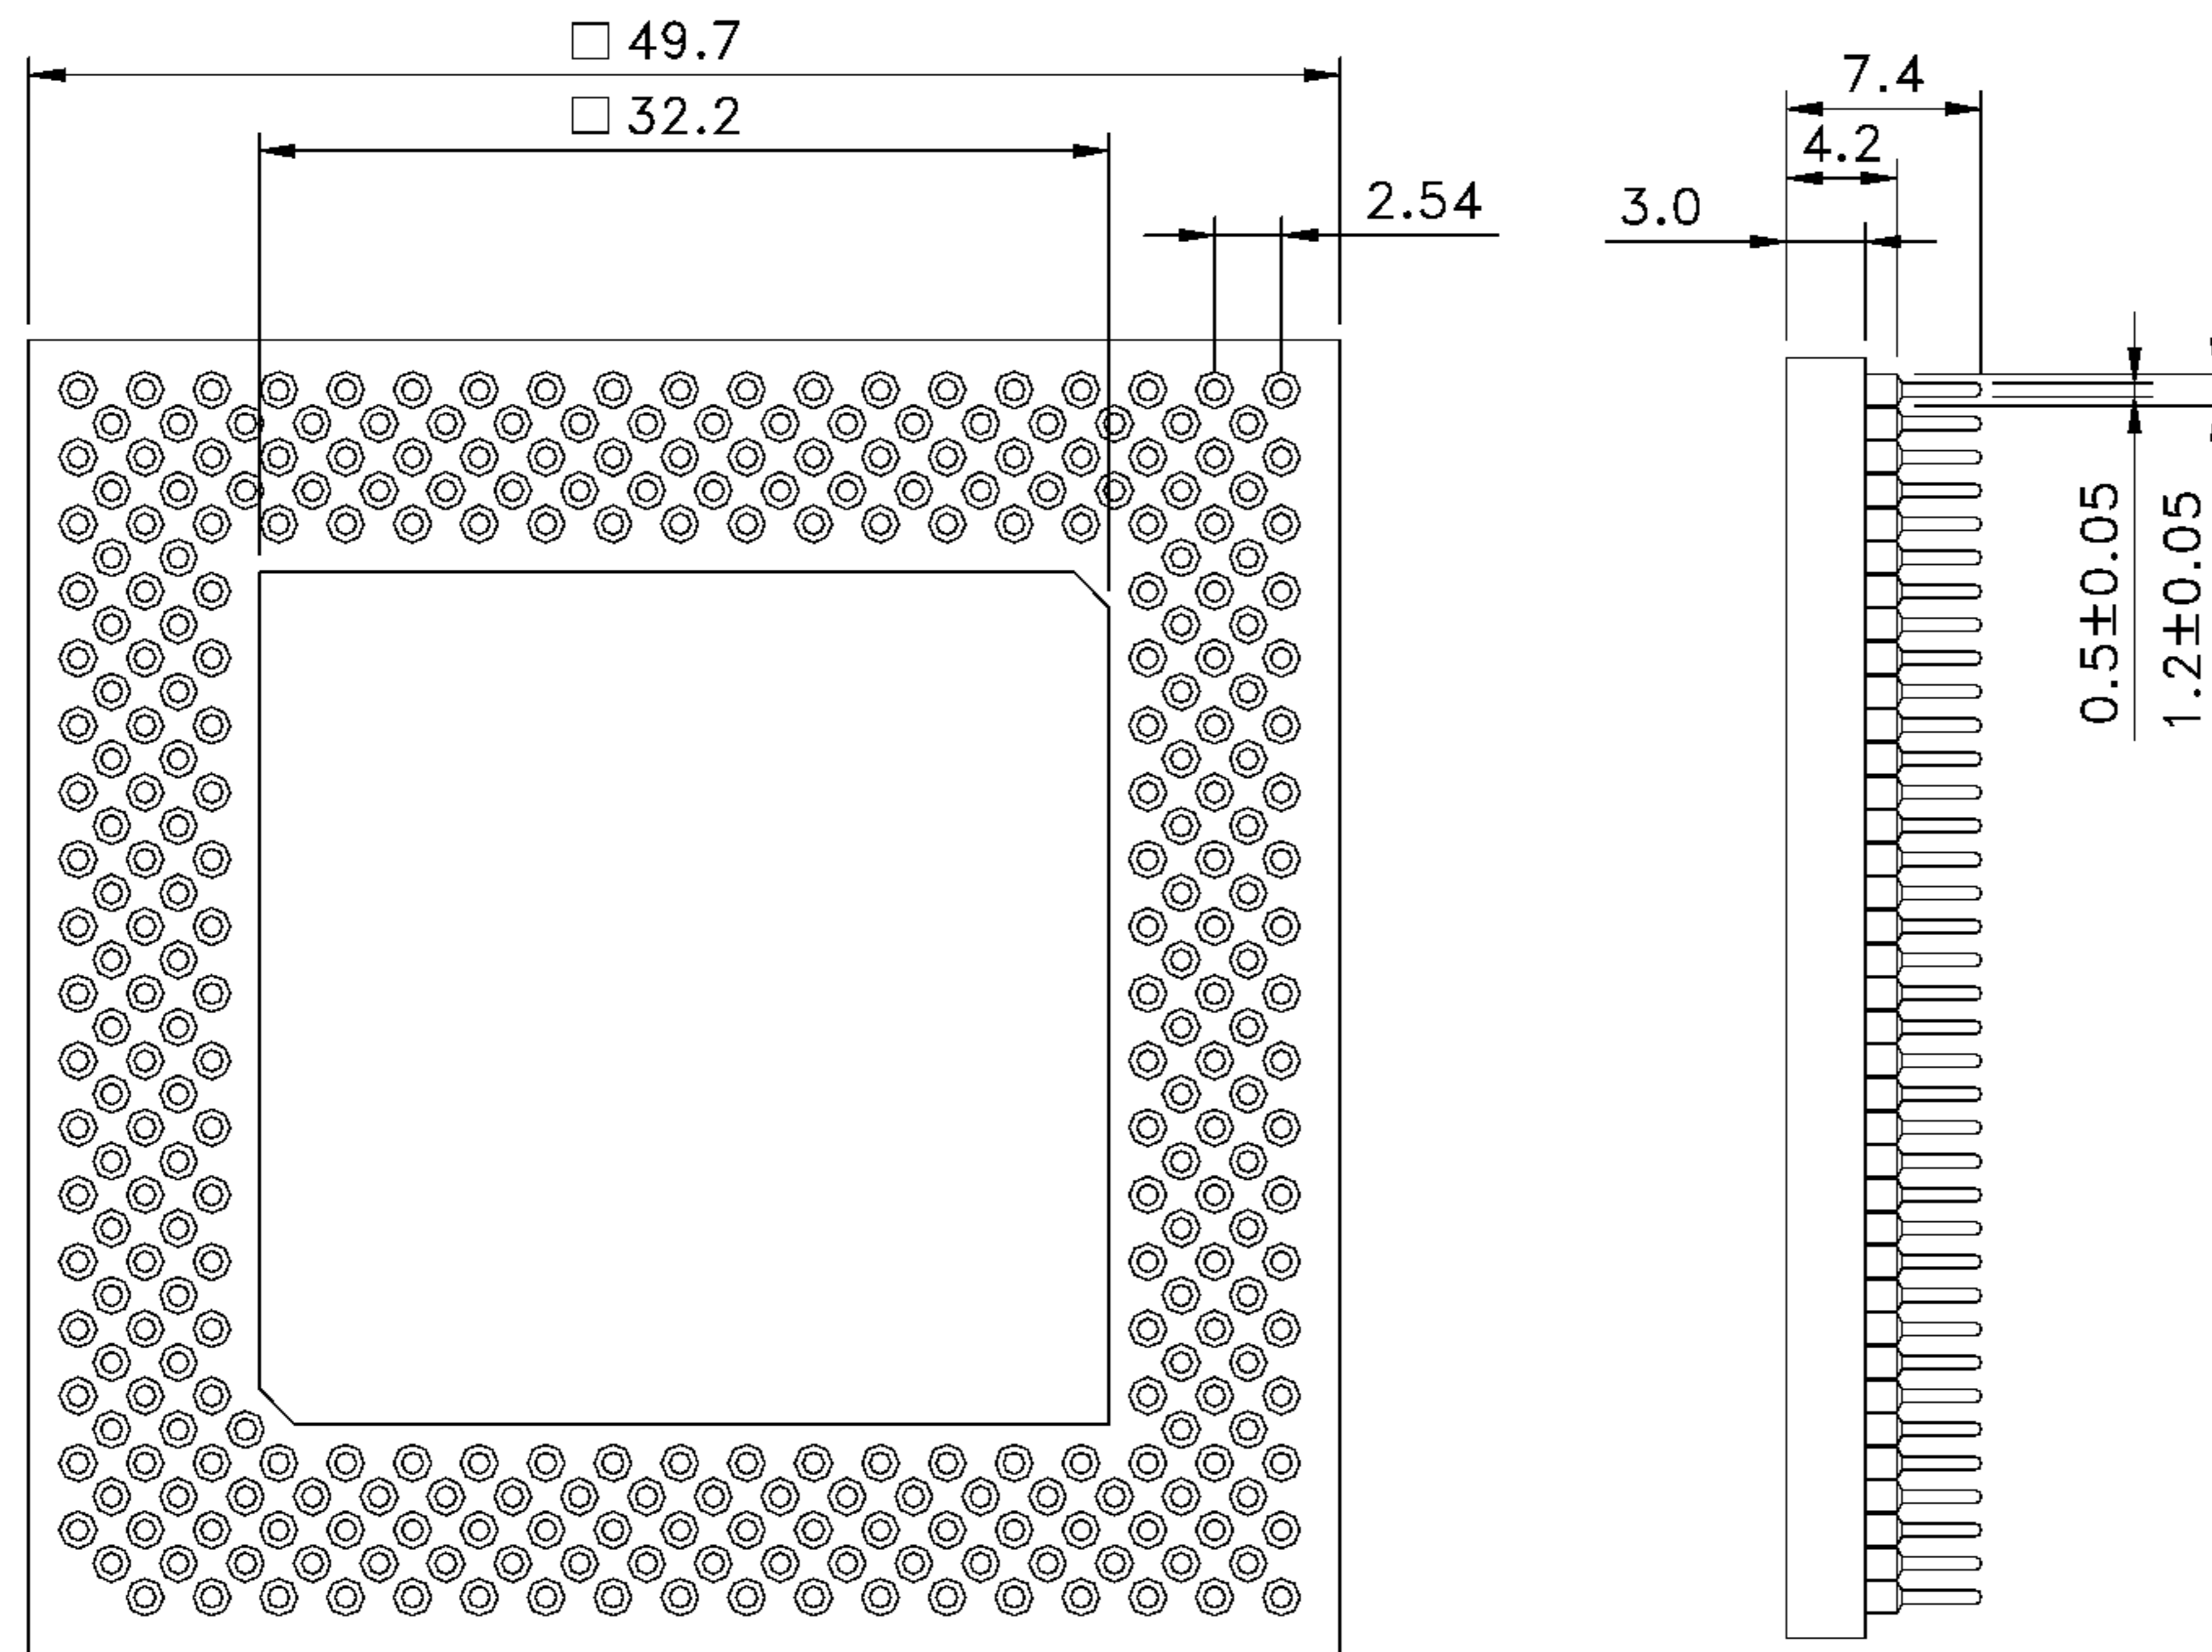

CONTACT

INNER: 6 FINGER CONTACT, IN HEAT TREATED
BERYLLIUM COPPER
FINISH: GOLD OVER 2-3 μ NICKEL OVER
COPPER FLASH

OUTER SLEEVE

FINISH: 5 μ TIN OVER 2-3 μ INCKEL OVER COPPER
FLASH

INSULATOR

GLASS FILLED POLYPHENLENE SULFIDE
UL94V-0 RATED. (P.P.S.)

ELECTRICAL DATA

CONTACT RESISTANCE < 4 ml PER CONTACT
INSULATION RESISTANCE > 10^{12} QU-100V
WORKING VOLTAGE: 10mv-60V

MECHANICAL DATA

TEMPERATURE RANGE: -55°C TO $+155^{\circ}\text{C}$
MECHANICAL LIFE CYCLE:
1000 CYCLE INSERTIONS AND WITHDRAWALS
WITH STEEL PIN 0.46mm

DRAWN:

GENERAL TOLERANCE:

 ± 0.2

CHECKED:

UNIT: MM

DESCRIPTION:

PGA SOCKET 320P

SIZE

SCALE:


SHEET: 1 / 1

PART NO:

6610-320-19

A4

PROJECTION:

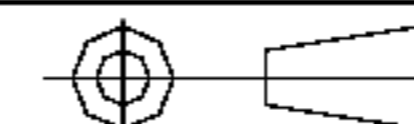

Jerry Chen

REV

DATE

FILE

BY