MATERIALS

CONTACT INNER:3 FINGER CONTACT ,IN HEAT TREATED BERYLLIUM COPPER.

CONTACT FINISH: GOLD OVER 2~3u", NICKEL OVER COPPER FLASH.

OUTER SLEEVE FINISH:TIN OVER 2~3u" NICKEL OVER COPPER FLASH.

INSULATOR: P.P.S

ELECTRICAL DATA

CONTACT RESISTANCE: <4m OHMS PER CONTACT.

INSULATION RESISTANCE: >10 OHMS U=100V

WORKING VOLTAGE: 10mV~60V

TEMPERATURE RANGE: -55°C~+155°C

TOLERANCE:±0.2mm

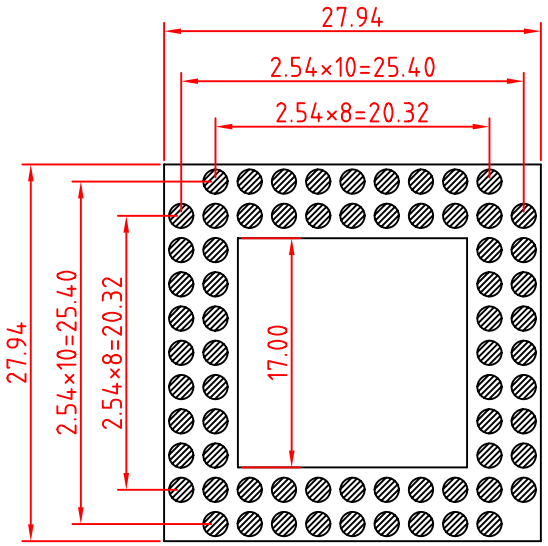

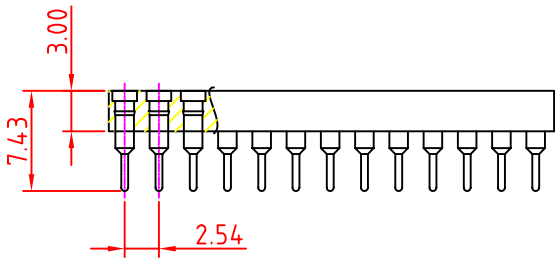

PGA 11X11 Contact:68 pin

Footprint : 20

UNIT:mm

??REVSION	?? DATE	?? DESCREPION	PGA SOCKET 68 PIN	