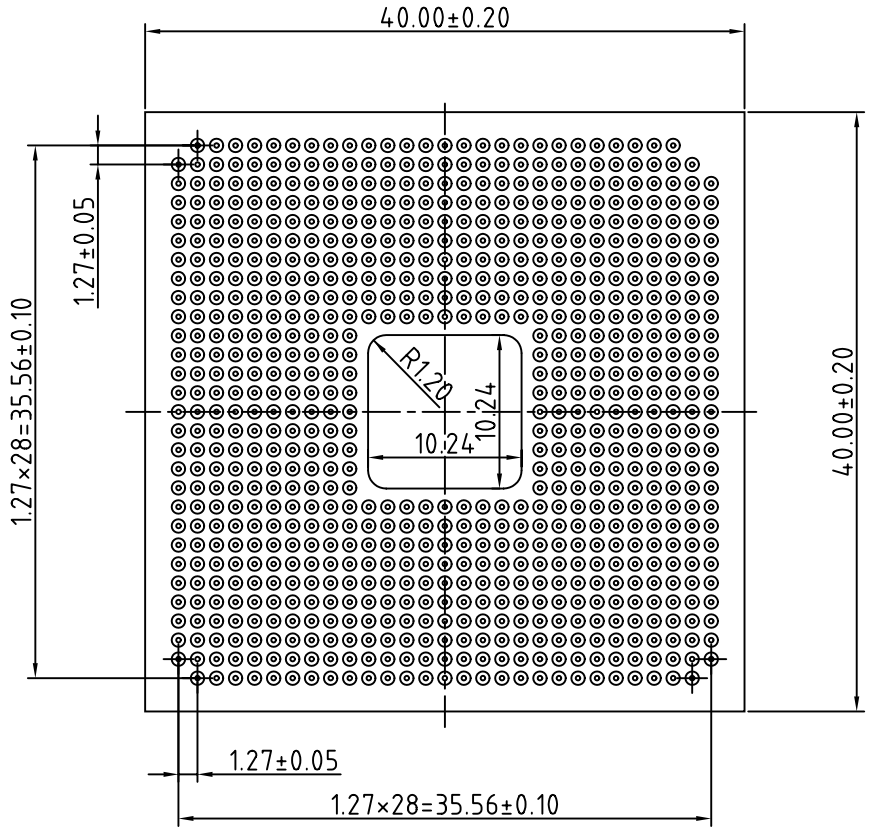

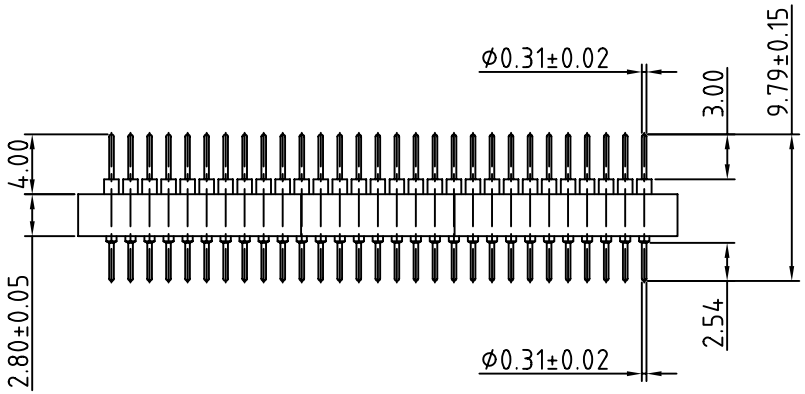

Technical Data:

Material

- Pin : Brass,Screw Machined
- Outer sleeve : CuZn38pb2
- Plating (Sleeve) : Tin plated over Brass & Nickel, or 3u"Gold Plated over Brass
- Special Plating : see teble on "Pin Plated Code"
- Insulator body : FR-4

Electrical

- Current rating :3Amps/contact max.
- Contact resistance:≦ 4mΩ /contact
- Insulation resistance:≧ 1KMΩ at V=100V
- Operating Voltage:60 Vac/DC

Mechanical

- Operating temperature(continuous) : Gold plated : -55°C to +125°C
  Tin plated : -40°C to +105°C
- Soldering temperature:+260°C,10s max.

UNIT:mm

??REVSION	?? DATE	?? DESCREPION

PGA 29×29 754P (9.79mm PIN)