
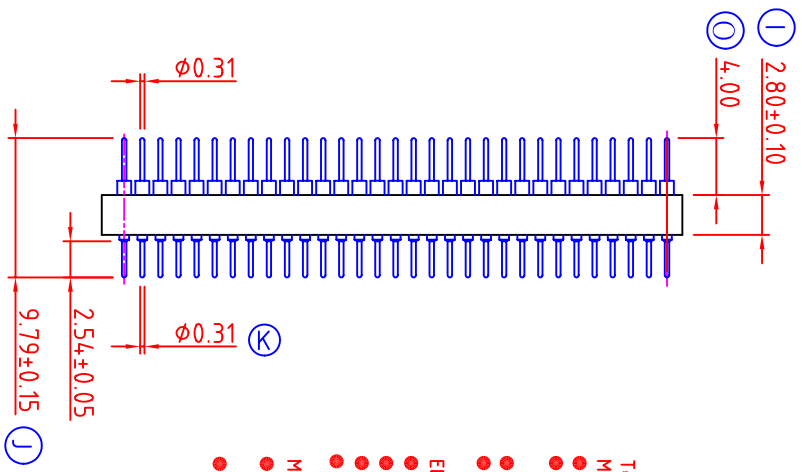


SIGN	DATE	DESCRIPTION	APPROVER
△			
△			
△			

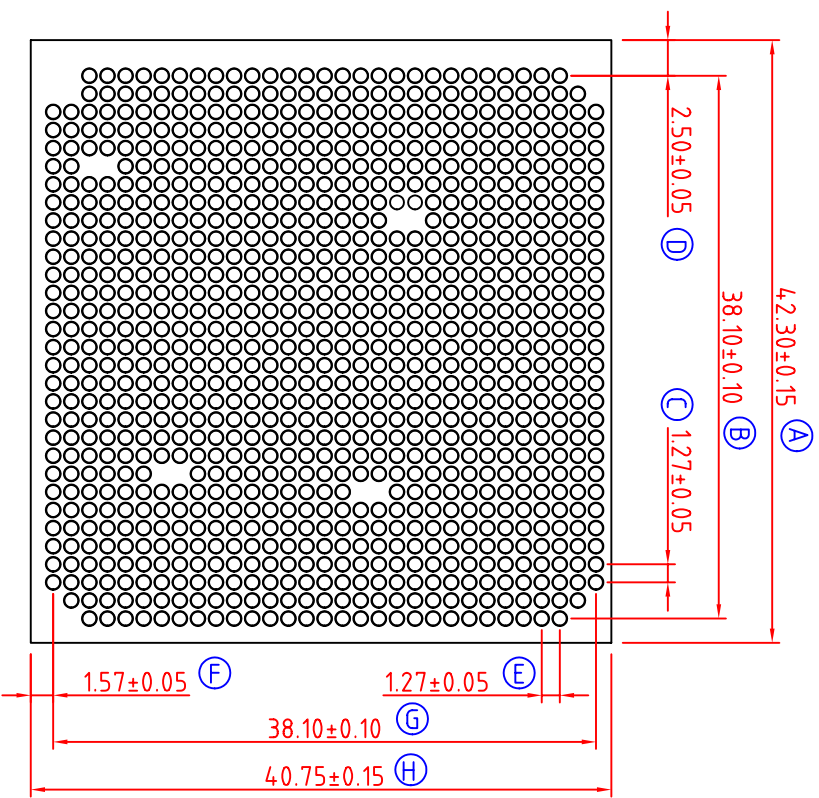

PGA 31x31 CONTACT: 940 Pin FootPrint: 76

SQ2760X0

Code	Pin plated
0	Tin 200u"
1	Gold 3u"
2	Gold 10u"
3	Gold 30u"

- Technical Data:**
- Material : Brass, Screw Machined
 - Pin : Tin plated over Brass & Nickel, or 3u" Gold Plated over Brass, : see table on "Pin Plated Code"
 - Plating (Sleeve) : FR-4
 - Special Plating : Insulator body
- Electrical**
- Current rating : 3Amps/contact max.
 - Contact resistance: $\leq 4m\Omega$ /contact
 - Insulation resistance: $\geq 1KM\Omega$ at V=100V
 - Operating Voltage: 60 Vac/DC
- Mechanical**
- Operating Temperature (continuous) : Gold plated : -55°C to +125°C
 - Tin plated : -40°C to +105°C
 - Soldering temperature: +260°C, 10s max.
- Ordering information:

PART NAME: SQ-PGA 940P 9.79mm PIN		TITLE:	
PART NO.: SQ2760X0		DWG NAME: SQ0001A1-940	
APPROVED BY	CHECKED BY	DESIGNED BY	DRAWN BY
		黄新疆	黄新疆
		2004.05.26	2004.05.24
UNITS: mm		Tolerance	
SCALE: 2.5:1		X, ±0.50	
REVISION: A1		XX, ±0.30	
		XXX, ±0.10	
		X°, ±1°	